


TS 1X32

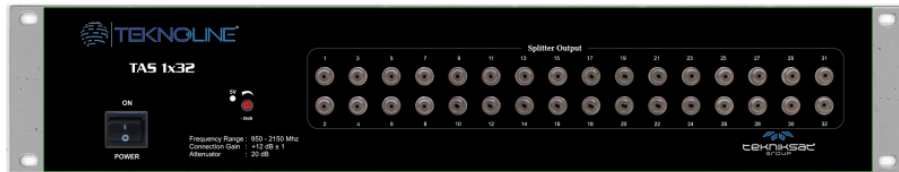

- Produced for professional projects
- Can connect 32 different multiswitch with independent outputs
- Adjustable gain due to 20 Db attenuator
- LNB voltage supply
- LNB short circuit protection
- Linner sat broadcast output due to filters on each subs output
- Led warning system
- Extra sat filter and IF amplifiers at polarity input
- Independent high insulated outputs
- High insulated SMPS power supply
- Can work at low signals due to high gain at subs outputs
- Easy and compact installation
- Low power consumption due to new gen smd components
- Compatible with digiturk systems
- Quad&Quattro usage feature
- Subs port protection up to 100 volts
- 100 m distribution length for each subs
- 950-2150 mHz sharp and amplified for each output
- Output 32 F konektör
- Frequency Range SAT. 950-2150 Mhz
- SAT Above Gain +13dB±1
- Attenuator adjustment 0...20dB
- Max. Input SAT 90dB ±5
- Isolation >30dB

- Current 900mA
- Power Supply 18V 2500mA
- Ambient Temperature -25...+50C°
- Dimensions: 490x90x60mm
- Weight: 560gr
- Desi: 0.792